



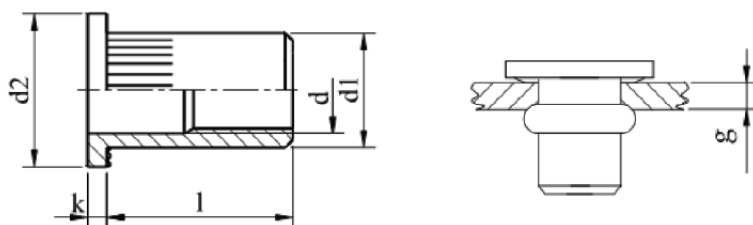

Nitonakrętki przelotowe z trzpieniem cylindrycznym radełkowanym z kołnierzem walcowym

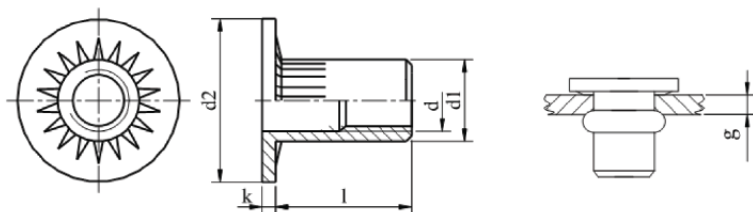

NORMA	MATERIAŁ	KLASA	POWŁOKA
	stal stal nierdzewna		ocynk galwaniczny

d	M3	M4		M5		M6	
d ₁	5	6		6,9		9,0	
d ₂	7,9	9		10		13	
k	0,7	0,8		1		1,5	
l	9,0	10,5	12,25	11,5	15	14,5	16,5
g*	0,25 – 2,00	0,25 – 3,00	3,00 – 4,50	0,25 – 3,00	3,00 – 5,50	1,00 – 3,00	3,00 – 5,50
*	5,1	6,1		7,1		9,1	

d	M8		M10		M12
d ₁	11,0		13		16
d ₂	16		19		23
k	1,5		2		2
l	16,0	18,5	22	26	23,5
g*	1,00 – 3,00	3,00 – 5,50	1,00 – 3,50	3,00 – 6,00	1,00 – 4,00
*	11,1		13,1		16,1