




Nity konstrukcyjne zrywalne z łbem płaskim St/St

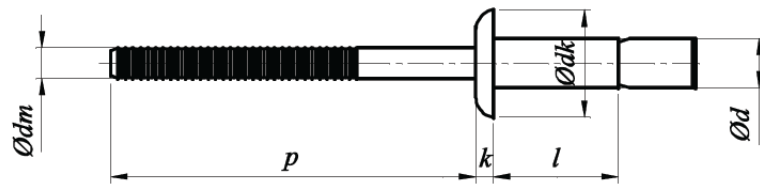

NORMA	MATERIAŁ	KLASA	POWŁOKA
	St/St		

d_{nom}			4,8	6,5	10
d	max		4,88	6,58	9,88
	min		4,65	6,35	9,65
d_k	max		10	13,2	19,5
	min		9	12,2	18,5
k	max		2,2	3,0	4,4
d_m	max		3,1	4,1	6,2
*			4,9 – 5,1	6,6 – 6,9	10,0 – 10,4
$Długość\ nitu\ l$			$Zalecane\ zakresy\ łączenia\ *$		
nom	min	max			
10	9,01	10,99	1,6 – 6,9	–	–
14	13,01	14,99	1,6 – 11	2,0 – 9,5	–
20	19,01	20,99	–	2,0 – 15,9	–
21	20,01	21,99	–	–	3,1 – 14,5