




Nity zrywalne rozprężne (bananowe) z łbem płaskim Al/St

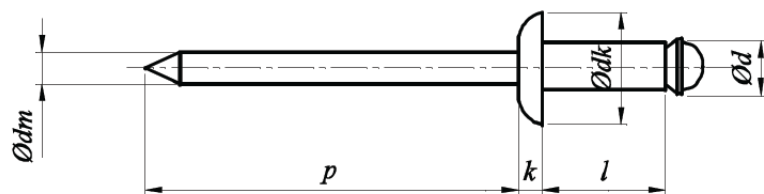

NORMA	MATERIAŁ	KLASA	POWŁOKA
	Al/St		

d_{nom}			3,2	4,0	4,8
d	<i>max</i>		3,28	4,08	4,88
	<i>min</i>		3,12	3,85	4,65
d_k	<i>max</i>		6,24	8,3	9,8
	<i>min</i>		5,76	7,7	9,2
k	<i>max</i>		1,0	1,4	1,5
	<i>min</i>		0,8	1	1,1
d_m			1,8	2,2	2,6
P_{min}			27	27	27
*			3,7	4,5	5,3
Długość nitu l			Zalecane zakresy łączenia *		
<i>nom</i>	<i>min</i>	<i>max</i>			
8	7,8	9	0,5 – 1	–	–
10	9,8	11	1 – 3	1,5 – 5	0,5 – 4
12	11,8	13	–	4 – 6,5	2 – 6
14	13,8	15	–	6 – 9	4 – 8
16	15,8	17	–	8 – 11	6 – 10
18	17,8	19	–	10 – 13	8 – 12
20	19,8	21	–	12 – 15	10 – 14
22	21,8	23	–	–	12 – 16
25	24,8	26	–	15 – 20	16 – 19
30	29,8	31	–	20 – 25	19 – 24
35	34,8	36	–	–	24 – 29
40	39,8	41	–	–	29 – 34
50	49,8	51	–	–	39 – 44