

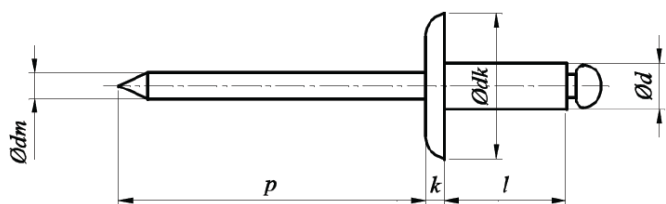


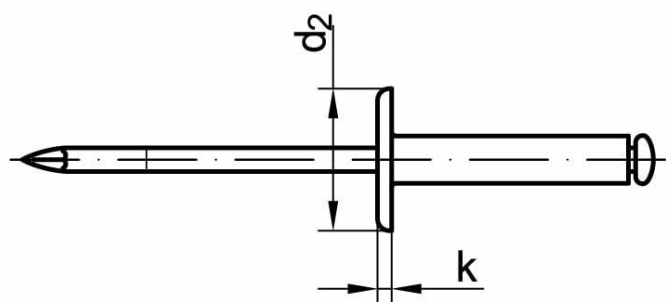

Nity zrywalne z łbem płaskim powiększonym Al/A2

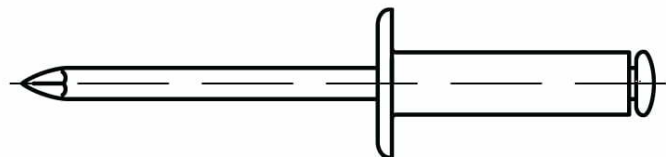

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 7337 C	Al/A2		cynk galwaniczny

d _{nom}			5,0		
d			max	5,08	
			min	4,85	
d _k			max	14	16,0
			min	13,4	15,4
kmax			1,8	2,0	
d _m			2,63	2,62	
*			5,1	5,1	
Długość nitu l			Zalecany zakres łączenia *		
nom	min	max			
8	7,8	9	2,4 – 4		
10	9,8	11	4 – 6		
12	11,8	13	6 – 8		
14	13,8	14	7,5 – 10		
16	15,8	17	9,5 – 12		
18	17,8	19	11,5 -13,5		
20	19,8	20	13,0 – 15		
25	24,8	26	15 – 20		
30	29,8	31	20 – 25		
* – Dane producenta. W celu doboru parametrów osadzania zaleca się wykonanie prób.					