
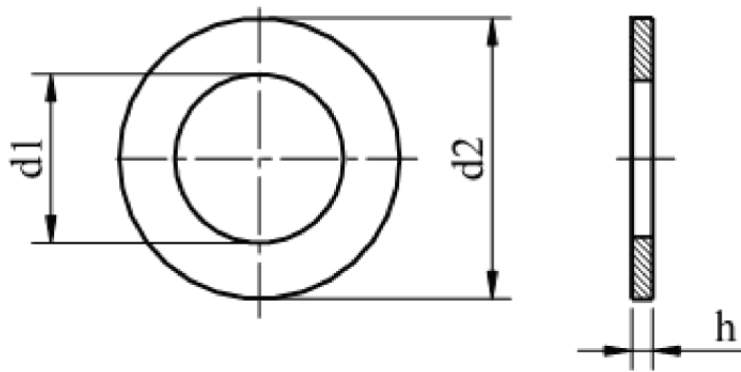


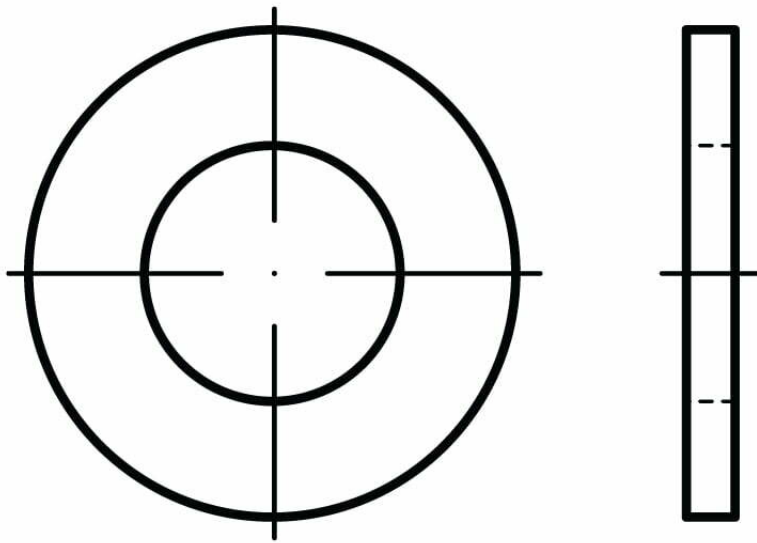

| NORMA              | MATERIAŁ                             | KLASA | POWŁOKA                            |
|--------------------|--------------------------------------|-------|------------------------------------|
| DIN 125 A ISO 7089 | 1.4462<br>1.4529<br>1.4539<br>1.4571 |       | ocynk galwaniczny<br>ocynk ogniowy |
| Forma A            |                                      |       |                                    |

| <i>d</i>             | M5   | M6   | M8   | M10  | M12  | M16  | M20  | M24  |
|----------------------|------|------|------|------|------|------|------|------|
| <i>d<sub>1</sub></i> | 5,3  | 6,4  | 8,4  | 10,5 | 13,0 | 17,0 | 21,0 | 25,0 |
| <i>d<sub>2</sub></i> | 10,0 | 12,0 | 16,0 | 20,0 | 24,0 | 30,0 | 37,0 | 44,0 |
| <i>h</i>             | 1,0  | 1,6  | 1,6  | 2,0  | 2,5  | 3,0  | 3,0  | 4,0  |

| <i>d</i>             | M27  | M30  |
|----------------------|------|------|
| <i>d<sub>1</sub></i> | 28,0 | 31,0 |
| <i>d<sub>2</sub></i> | 50,0 | 56,0 |
| <i>h</i>             | 4,0  | 4,0  |