



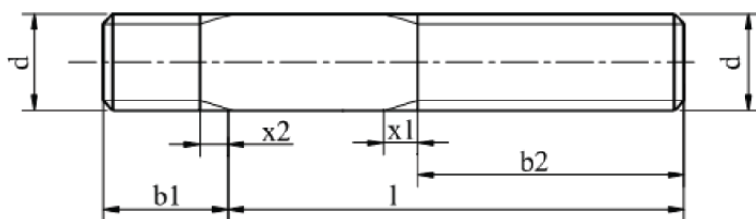

Śruby dwustronne o długości części wkręcanej 1d DIN 938, PN 82125

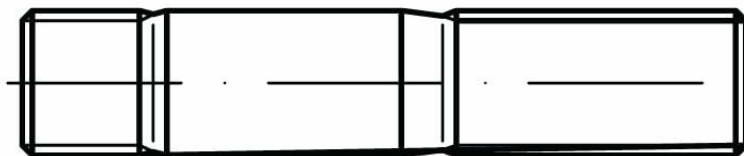

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 938 PN 82125	stal A2 A4	5.6 5.8 8.8 10.9	cynk galwaniczny cynk termodyfuzyjny

d	M5	M6	M8	M10	M12	M14	M16	M18
b ₁	5	6	8	10	12	14	16	18
x ₁	2	2,5	3,2	3,8	4,3	5,0	5,0	6,3
x ₂	1,0	1,25	1,6	1,9	2,2	2,5	2,5	3,2
b ₂ l<125	16	18	22	26	30	34	38	42
b ₂ 125< l<200	22	24	28	32	36	40	44	48
b ₂ l>200	–	–	–	45	49	53	57	61

d	M20	M22	M24	M27	M30	M33	M36	
b ₁	20	22	24	27	30	33	36	
x ₁	6,3	6,3	7,5	7,5	9,0	9,0	10,0	
x ₂	3,2	3,2	3,8	3,8	4,5	4,5	5,0	
b ₂ l<125	46	50	54	60	66	72	78	
b ₂ 125< l<200	53	56	60	66	72	78	84	
b ₂ l>200	65	69	73	79	85	91	97	