



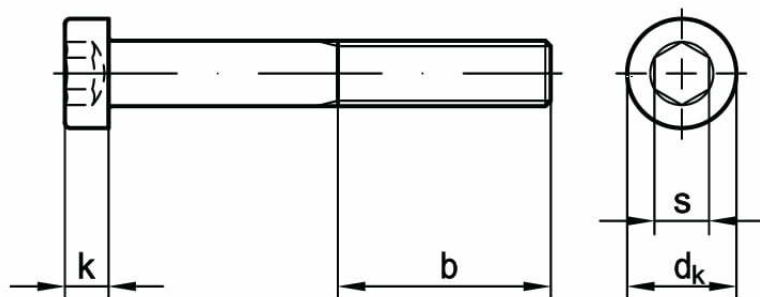

Śruby z łbem walcowym obniżonym z gniazdem sześciokątnym  
DIN 7984, ISO 14580

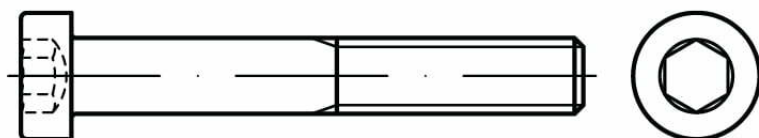

| NORMA                 | MATERIAŁ         | KLASA       | POWŁOKA                          |
|-----------------------|------------------|-------------|----------------------------------|
| DIN 7984<br>ISO 14580 | stal<br>A2<br>A4 | 8.8<br>10.9 | cynk galwaniczny<br>cynk- nikiel |

| d              | M3  | M4  | M5  | M6 | M8 | M10 | M12 |
|----------------|-----|-----|-----|----|----|-----|-----|
| d <sub>k</sub> | 5,5 | 7   | 8,5 | 10 | 13 | 16  | 18  |
| k              | 2   | 2,5 | 3   | 4  | 5  | 6   | 7   |
| s              | 2   | 2,5 | 3   | 4  | 5  | 7   | 8   |
| b l<125        | 12  | 14  | 12  | 18 | 22 | 26  | 30  |
| b 125<l<200    | –   | –   | –   | –  | 28 | 32  | 36  |
| b l>200        | –   | –   | –   | –  | –  | –   | –   |

| d              | M14 | M16 | M18 | M20 | M22 | M24 |  |
|----------------|-----|-----|-----|-----|-----|-----|--|
| d <sub>k</sub> | 21  | 24  | 27  | 30  | 33  | 36  |  |
| k              | 8   | 9   | 10  | 11  | 12  | 13  |  |
| s              | 10  | 12  | 12  | 14  | 14  | 17  |  |
| b l<125        | 34  | 38  | 42  | 46  | 50  | 54  |  |
| b 125<l<200    | 40  | 44  | 48  | 52  | 56  | 60  |  |
| b l>200        | –   | 57  | 61  | 65  | 69  | 73  |  |