



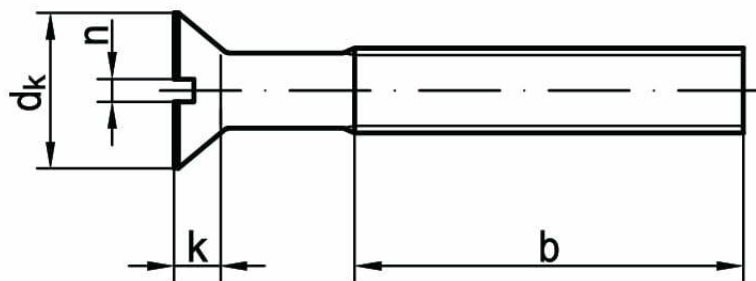

Wkręty z łbem stożkowym z rowkiem DIN 963, PN 82207, ISO 2009

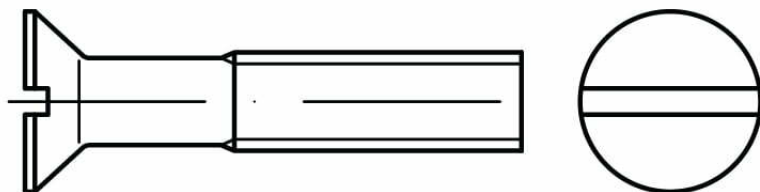

| NORMA                           | MATERIAŁ                                       | KLASA             | POWŁOKA                         |
|---------------------------------|------------------------------------------------|-------------------|---------------------------------|
| DIN 963<br>PN 82207<br>ISO 2009 | stal<br>A1<br>A2<br>A4<br>mosiądz<br>aluminium | 4.8<br>5.8<br>8.8 | cynk galwaniczny<br>cynk-nikiel |

| d                  | M1   | M1,2 | M1,4 | M1,6 | M1,8 | M2  | M2,5 | M3   |
|--------------------|------|------|------|------|------|-----|------|------|
| d <sub>k</sub>     | 1,9  | 2,3  | 2,6  | 3,0  | 3,4  | 3,8 | 4,7  | 5,6  |
| k                  | 0,6  | 0,72 | 0,84 | 0,96 | 1,08 | 1,2 | 1,5  | 1,65 |
| b                  | *    | *    | *    | 15   | 15   | 16  | 18   | 19   |
| n                  | 0,25 | 0,3  | 0,3  | 0,4  | 0,4  | 0,5 | 0,6  | 0,8  |
| * – gwint do głowy |      |      |      |      |      |     |      |      |
| d                  | M4   | M5   | M6   | M8   | M10  | M12 | M16  |      |
| d <sub>k</sub>     | 7,5  | 9,2  | 11   | 14,5 | 18   | 22  | 29   |      |
| k                  | 2,2  | 2,5  | 3    | 4    | 5    | 6   | 8    |      |
| b                  | 22   | 25   | 28   | 34   | 40   | 46  | 58   |      |
| n                  | 1    | 1,2  | 1,6  | 2    | 2,5  | 3   | 4    |      |