




Wkręty do drewna z łbem walcowym wypukłym, utwardzane z wgł. krzyż. Pz (Pozidriv) EL 203

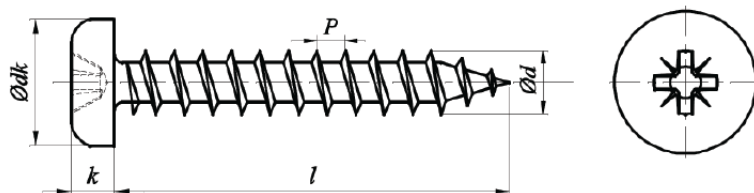

NORMA	MATERIAŁ	KLASA	POWŁOKA
	stal stal nierdzewna A2		ocynk galwaniczny

d		2,5	3	3,5	4	4,5	5	6
dk	min	4,7	5,60	6,60	7,50	8,40	9,40	11,30
	max	5,00	6,00	7,00	8,00	9,00	10,00	12,00
k	min	1,57	2,13	2,48	2,68	2,90	3,35	3,90
	max	1,82	2,37	2,72	2,92	3,15	3,65	4,25
Z – wgłębienie krzyżowe Pozidriv		1	1	2	2	2	2	3