



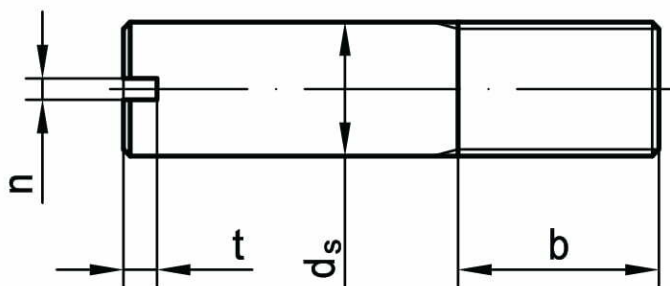

# Wkręt dociskowy z czopem walcowym DIN 417, PN 82276, ISO 7435

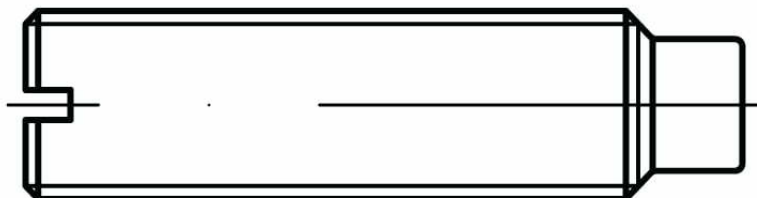

| NORMA                           | MATERIAŁ         | KLASA | POWŁOKA |
|---------------------------------|------------------|-------|---------|
| DIN 417<br>PN 82276<br>ISO 7435 | stal<br>A2<br>A4 |       |         |

| d     | M3  | M4   | M5   | M6   | M8  | M10 | M12 | M16 |
|-------|-----|------|------|------|-----|-----|-----|-----|
| $d_p$ | 2   | 2,5  | 3,5  | 4    | 5,5 | 7   | 8,5 | 12  |
| $b^*$ | 1,5 | 2    | 2,5  | 3    | 4   | 5   | 6   | 7   |
| n     | 0,4 | 0,6  | 0,8  | 1    | 1,2 | 1,6 | 2   | 2,5 |
| t     | 0,8 | 0,96 | 1,12 | 1,28 | 1,6 | 2   | 2,4 | 2,8 |