



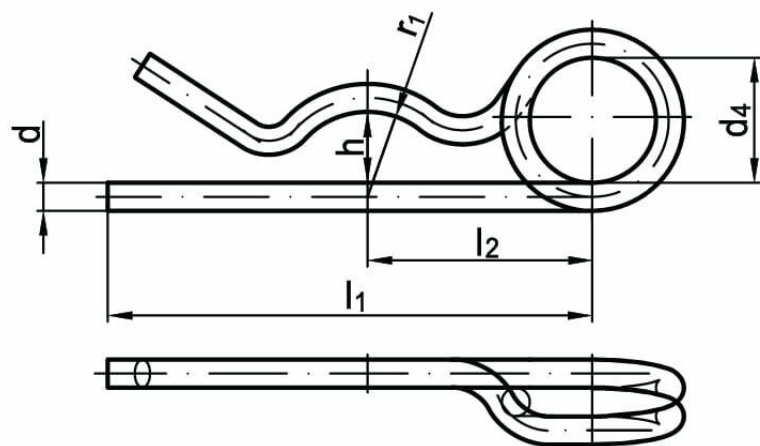

Zawleczki sprężyste podwójne DIN 11024

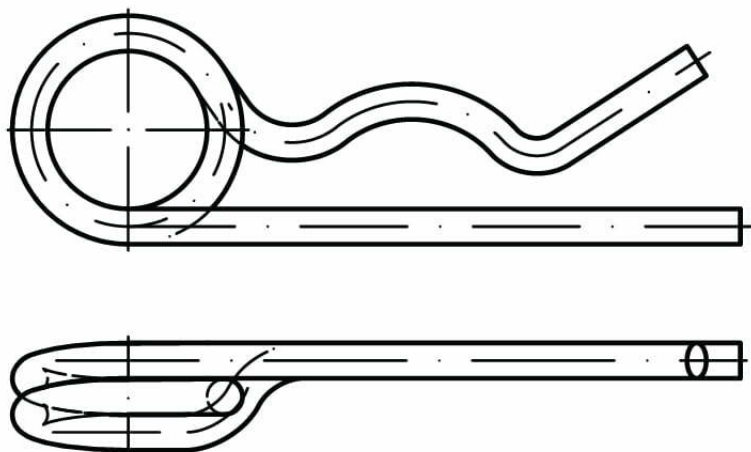

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 11024	stal A2		cynk galwaniczny

d	2,5	3,2	4	5	6,3	7	8
d ₃	2,25	2,8	3,6	4,5	5,6	6,3	7
d ₄	20	20	20	25	25	30	30
l ₁	42	48	64	80	97	125	150
l ₂	24	26	32	39	45	56	63
h	2,5	3	4,5	7	9	12,5	17,5
r ₁	5,6	7	10	13	17	22,5	28
Ø trzpienia	9-11,2	11,2-14	14-20	20-26	26-34	34-45	45-56