




Hexalobular socket pan head tapping screws

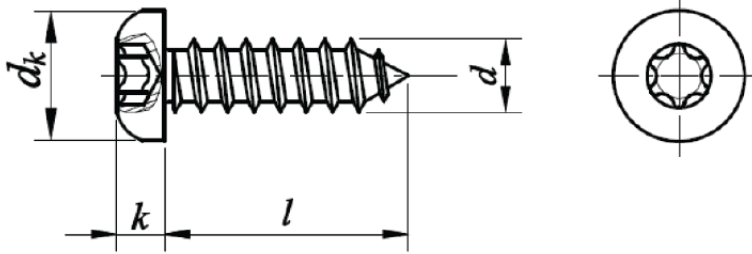

STANDARD	MATERIAL	CLASS	COATING
ISO 14585 C	steel		zinc plated

d	ST2,9	ST3,5	ST4,2	ST4,8	ST5,5	ST6,3	
P	1,1	1,3	1,4	1,6	1,8	1,8	
d _k	max	5,6	7	8	9,5	11	12
	min	5,3	6,64	7,64	9,14	10,57	11,57
k	max	2,4	2,6	3,1	3,7	4	4,6
	min	2,15	2,35	2,8	3,4	3,7	4,3
T	10	15	20	25	25	30	

T – Torx hexalobular socket

P – thread pitch