




Thread rolling hexalobular socket head cap screws

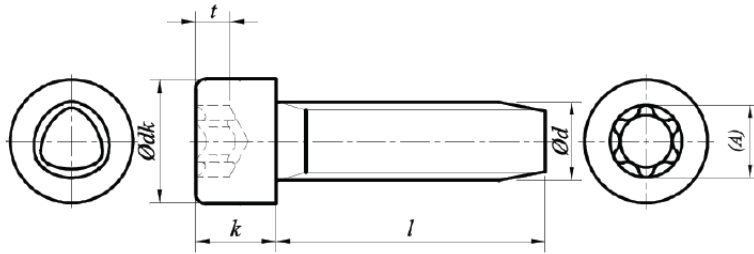

STANDARD	MATERIAL	CLASS	COATING
DIN 7500 OE			

d		M5	M6	M8
P		0,8	1	1,25
d _k	max 1)	8,5	10	13
	max 2)	8,72	10,22	13,27
	min	8,28	9,78	12,73
k	max	5	6	8
	min	4,82	5,7	7,64
Torx (Tx)*	nr/No	25	30	45
	(A)-	4,5	5,6	7,95
	t max	2,03	2,42	3,31
	t min	1,65	2,02	2,92