



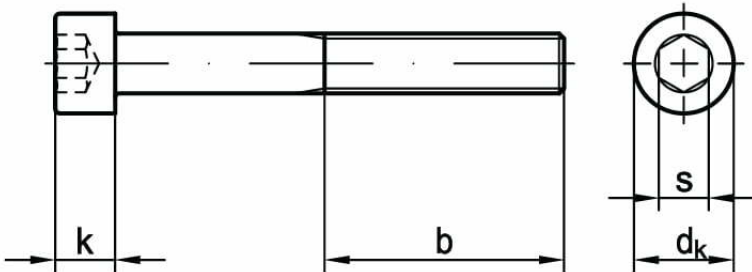

Śruby z łbem walcowym z gniazdem sześciokątnym DIN 912,  
ISO 4762, PN 82302, ISO 12474, ISO 14579

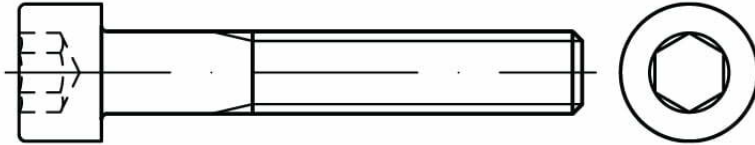

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 912 ISO 4762 PN 82302 ISO 12474 ISO 14579	C35 C45 24CrMo5 25CrMo4 42CrMo4 1.4571 A2, A4, Mosiądz Miedź	8.8 10.9 12.9	cynk galwaniczny cynk ogniowy cynk termodyfuzyjny cynk płatkowy cynk-nikiel

d	M1,4	M1,6	M2	M2,5	M3	M4	M5	M6
b	14	15	16	17	18	20	22	24
d <sub>s</sub>	2,6	3	3,8	4,5	5,5	7	8,5	10
k <sub>DIN/ISO</sub>	1,4	1,6	2	2,5	3	4	5	6
s <sub>DIN/ISO</sub>	1,3	1,5	1,5	2	2,5	3	4	5

d	M8	M10	M12	M14	M16	M18	M20	M22
b	28	32	36	40	44	48	52	56
d <sub>s</sub>	13	16	18	21	24	27	30	33
k <sub>DIN/ISO</sub>	8	10	12	14	16	18	20	22
s <sub>DIN/ISO</sub>	6	8	10	12	14	14	17	17

d	M24	M27	M30	M33	M36	M39	M42	M45
b	60	66	72	78	84	90	96	102
d <sub>s</sub>	36	40	45	50	54	58	63	68
k <sub>DIN/ISO</sub>	24	27	30	33	36	39	42	45
s <sub>DIN/ISO</sub>	19	19	22	24	27	27	32	36

d	M48	M52	M56	M64	M72			
b	108	116	124	140	156			
d <sub>s</sub>	72	78	84	96	108			
k <sub>DIN/ISO</sub>	48	52	56	64	72			
s <sub>DIN/ISO</sub>	36	36	41	46	55			