



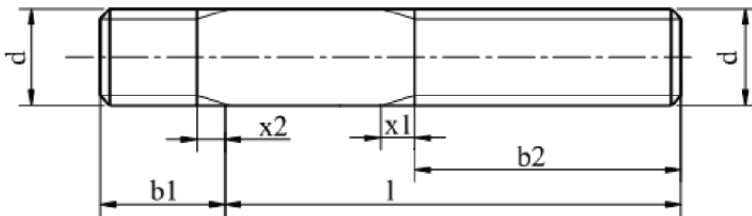

Śruby dwustronne o długości części wkręcanej 1d DIN 938, PN 82125

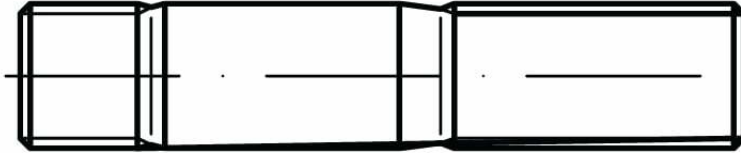

| NORMA | MATERIAŁ | KLASA | POWŁOKA |
|---------------------|------------------|---------------------------|---|
| DIN 938 PN 82125 | stal A2 A4 | 5.6 5.8 8.8 10.9 | cynk galwaniczny cynk termodyfuzyjny |

| d | M5 | M6 | M8 | M10 | M12 | M14 | M16 | M18 |
|------------------------------|-----|------|-----|-----|-----|-----|-----|-----|
| b_1 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 18 |
| x_1 | 2 | 2,5 | 3,2 | 3,8 | 4,3 | 5,0 | 5,0 | 6,3 |
| x_2 | 1,0 | 1,25 | 1,6 | 1,9 | 2,2 | 2,5 | 2,5 | 3,2 |
| $b_2 \text{ } l < 125$ | 16 | 18 | 22 | 26 | 30 | 34 | 38 | 42 |
| $b_2 \text{ } 125 < l < 200$ | 22 | 24 | 28 | 32 | 36 | 40 | 44 | 48 |
| $b_2 \text{ } l > 200$ | – | – | – | 45 | 49 | 53 | 57 | 61 |

| d | M20 | M22 | M24 | M27 | M30 | M33 | M36 | |
|------------------------------|-----|-----|-----|-----|-----|-----|------|--|
| b_1 | 20 | 22 | 24 | 27 | 30 | 33 | 36 | |
| x_1 | 6,3 | 6,3 | 7,5 | 7,5 | 9,0 | 9,0 | 10,0 | |
| x_2 | 3,2 | 3,2 | 3,8 | 3,8 | 4,5 | 4,5 | 5,0 | |
| $b_2 \text{ } l < 125$ | 46 | 50 | 54 | 60 | 66 | 72 | 78 | |
| $b_2 \text{ } 125 < l < 200$ | 53 | 56 | 60 | 66 | 72 | 78 | 84 | |
| $b_2 \text{ } l > 200$ | 65 | 69 | 73 | 79 | 85 | 91 | 97 | |