




# Śruby z łbem stożkowym z noskiem DIN 604, PN 82408

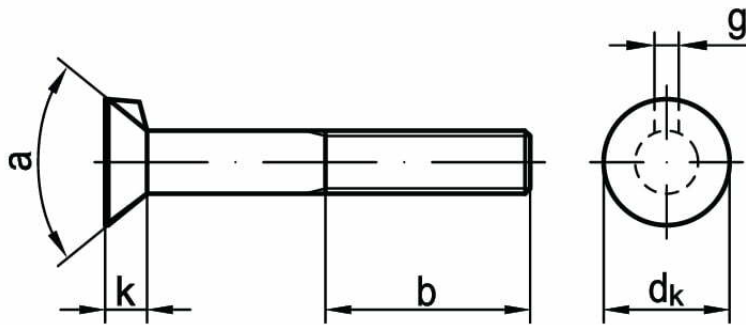

|      |      |              |
|------|------|--------------|
| stal | 10.9 | bez pokrycia |
|------|------|--------------|

| $\varnothing d$  | M6                 | M8   | M10  | M12  | M16  | M20  | M24  |    |
|------------------|--------------------|------|------|------|------|------|------|----|
| P                | 1                  | 1,25 | 1,5  | 1,75 | 2    | 2,5  | 3    |    |
| $\varnothing dk$ | 12,5               | 16,5 | 19,6 | 24,6 | 32,8 | 32,8 | 38,8 |    |
| b                | $l \leq 125$       | 18   | 22   | 26   | 30   | 38   | 46   | 54 |
|                  | $125 < l \leq 200$ | 24   | 28   | 32   | 36   | 44   | 52   | 60 |
|                  | $l > 200$          |      | 41   | 45   | 49   | 57   | 65   | 73 |
| g                | 2,5                | 3    | 3,2  | 3,6  | 4,2  | 5,4  | 6,6  |    |
| k                | 4                  | 5    | 5,5  | 7    | 9    | 11,5 | 13   |    |
|                  | 90°                |      |      |      |      | 60°  |      |    |