




Podkładki płaskie DIN 125 A, ISO 7089, PN 82006

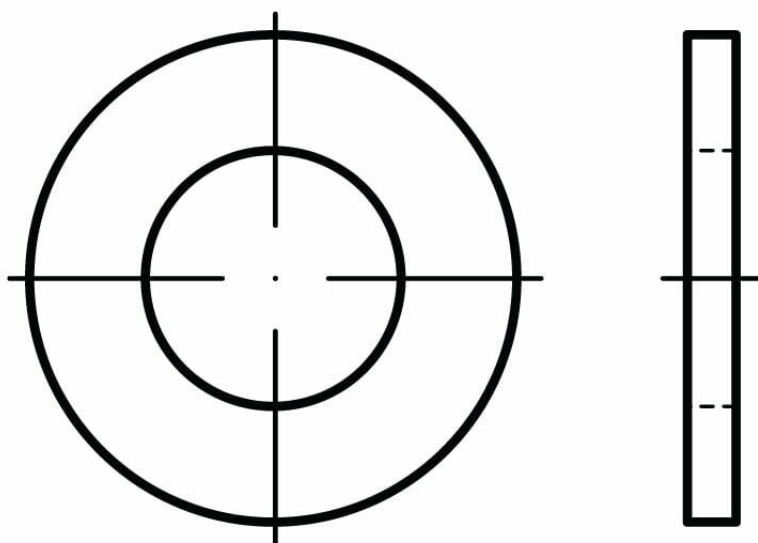

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 125 A ISO 7089 PN 82006	stal A2 A4 mosiądz miedź aluminium	140HV 200HV 300HV	cynk galwaniczny cynk ogniowy cynk termodyfuzyjny cynk płatkowy cynk-nikiel
Forma A (bez fazy)			

	M1,6	M2	M2,5	M3	M4	M5	M6	M7
d ₁	1,7	2,2	2,7	3,2	4,3	5,3	6,4	7,4
d ₂	4	5	6	7	9	10	12	14
h	0,3	0,3	0,5	0,5	0,8	1,0	1,6	1,6

d	M8	M10	M12	M14	M16	M18	M20	M22
d ₁	8,4	10,5	13,0	15,0	17,0	19,0	21,0	23,0
d ₂	16	20	24	28	30	34	37	39
h	1,6	2,0	2,5	2,5	3,0	3,0	3,0	3,0

d	M24	M27	M30	M33	M36	M39	M42	M45
d ₁	25	28	31	34	37	42	45	48
d ₂	44	50	56	60	66	72	78	85
h	4	4	4	5	5	6	8	8

d	M48	M52	M56	M60	M64	M68	M72	M76
d ₁	52	56	62	66	70	74	78	82
d ₂	92	98	105	110	115	120	125	135
h	8	8	10	10	10	10	10	10